



BHL 400 K307 230/240V 50Hz BC2-I60

Product family description

Impregnated electromagnetic copper/iron ballasts for use with an external semi parallel ignitor for HPL and HPI (Plus) lamps

Features and Benefits

- Long lifetime - at least 10 years of continuous operation at $T_w=140^{\circ}\text{C}$
- Control gear can be installed remotely; substantial distance allowed between ballast/ignitor & lamp
- Semi parallel topology for best system performance
- Ballast can also be used in combination with series (superimposed) ignitor
- Equipped as standard with screw terminal blocks; insert contact on request

Application

- Ideal for the following applications:
- Climatic suitability: restricted to built-in situations where relative humidity is limited
- High-bay lighting, e.g. industrial workshops, exhibition halls, hypermarkets, shopping malls, churches, airports, railway stations
- Road and residential lighting
- Recreational sports lighting, indoor and outdoor
- Floodlighting of buildings and monuments
- Area lighting, e.g. harbors, building sites
- Canopy lighting, e.g. petrol stations


Product data	
Order code	887037 00
Full product code	872790088703700
locod	
Full product name	BHL 400 K307 230/240V 50Hz BC2-I60
Order product name	BHL 400 K307 230/240V 50Hz BC2-I60
Packing type	Unpacked
Pieces per pack	1
Packing configuration	6
Packs per outerbox	6

PHILIPS


Product data	
Bar code on pack - EAN1	8727900887037
Bar code on intermediate packing - EAN2	
Bar code on outerbox - EAN3	8727900887037
Logistic code(s) - I2NC	9137 002 78226
ILCOS code	
Net weight per piece	3.240 KG
Successor order code	
Rated Number of Lamps	1 piece
Rated Ballast-Lamp Power	400
Rated Lamptype	HPL/HPI
Application code	K307
Line Voltage	230/240V
Line Frequency	50Hz



BHL K307/K327 BC2-160

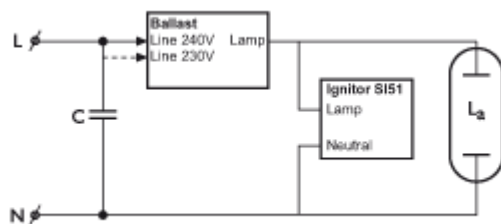

BHL 250/400 K307/K327

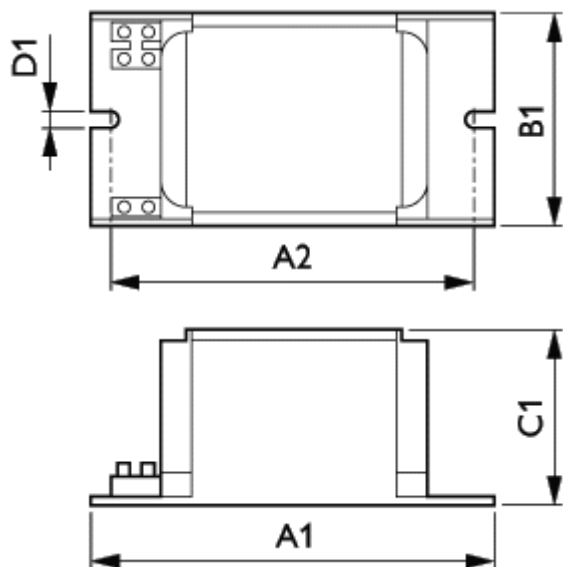

BHL K307/K327/L200/L200-LT/L201/L202/L204/L220/L221/L222/L224/L301/L302/L307/L307-TS/L322/L327/L327-TS/L407/L407-TS/L427/L427-TS

	A1	A2	B1	C1	D1
Full product name	Nom	Nom	Nom	Nom	Nom
BHL 400 K307 230/240 V 50Hz BC2-160	160.0	139.0	76.0	65.0	6.2



©2009 Koninklijke Philips Electronics N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Document order number : 0000 000 00000